

STAR SINE* **STATCOM RANGE**




The **STAR SINE m SERIES STATCOM** is designed for multi-function applications such as voltage regulation, dynamic real and reactive power control and battery backup.

FEATURES

- Full 4 quadrant device
- Dynamic Real and Reactive Power
- Integrated Battery Management System
- Multi Mode Operation (GC and OG)
- Remote data monitoring
- Single or Parallel Operation
- Passive Cooling
- Outdoor rated enclosure

M SERIES

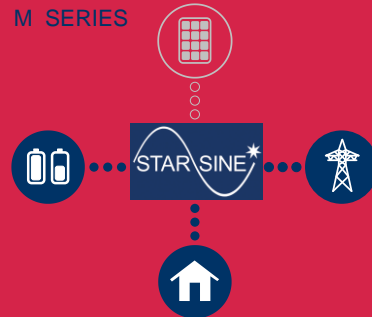

TECHNICAL SPECIFICATIONS

STATCOM MODEL	m105	m315
Phases	1	3 (L+N per phase)
Power Rating (continuous)	5kVA @ 40°C	15kVA @ 40°C
Parallel Operation	up to 20kVA	up to 60kVA
Phase Balancing	No	Yes
Operating Voltage	200 – 265Vrms (L-N)	
Frequency	50Hz (48 – 52Hz configurable)	
Power Factor	0.0 – 1.0 lagging, 0.0 – 1.0 leading (configurable)	
DC Input (battery)	380 – 480Vdc	
Efficiency	97%	
Harmonics	<3% at full load	
Anti-Islanding	Active	
Cooling	Passive (convection)	
Communications Interface	Ethernet IEEE 802.3	
AC Connection	6mm ² cable termination	
DC Connection	6mm ² cable termination	
Data Connection	RJ45	
IP Rating	IP65	
Mounting Options	Wall	
Dimensions (WxHxD)mm	300x800x230	300x800x230x3units
Weight	40kg	120kg (combined)
Standards	AS4777, AS3100, AS61000	

Note: specifications may vary depending on configuration.

